




ENERG Y IJA
 енергия · ενεργεια IE IA

NIBE

NIBE F1145-5



55 °C

35 °C



A++

A++



43 dB



dB

■ 5

■ 5

■ 5

kW

■ 6

■ 6

■ 6

kW



2015

811/2013



ENERG
енергия · ενεργεια

Y IJA
IE IA

NIBE


NIBE F1145-5 + VPB300




55°C




XXL

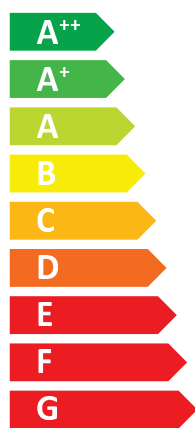

A++

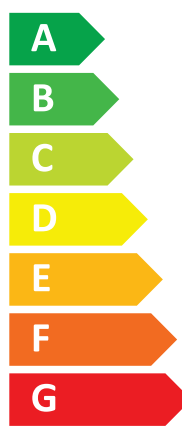

A

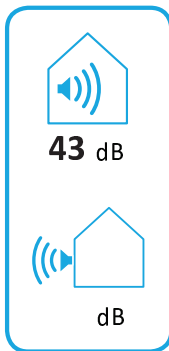

2015

811/2013



ENERG

енергия · ενεργεια

Y


IJA

IE

IA

NIBE

NIBE F1145-5



35 °C



A⁺⁺

A⁺⁺⁺

A⁺⁺⁺

A⁺⁺

A⁺

A

B

C


D

E

F

G

+



+



+



+





ENERG

енергия · ενεργεια

Y






IJA

IE


IA


NIBE


NIBE F1145-5 + VPB300









XXL

+ 




+ 

+ 



+ 



55 °C


XXL

Supplier's name:	NIBE		
Model:	NIBE F1145-5 (+VPB300)		
Temperature application	35	55	°C
Declared load profile for water heating	XXL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	5,8	5	kW
Annual energy consumption for space heating, average climate	2669	3027	kWh
Annual electricity consumption for water heating, average climate	2138		kWh
Seasonal space heating energy efficiency, average climate:	172	128	%
Water heating energy efficiency, average climate:	101		%
Sound power level LWA indoors	43		dB
Rated heat output, cold climate:	5,8	5	kW
Rated heat output, warm climate:	5,8	5	kW
Annual energy consumption for space heating, cold climate	3097	3495	kWh
Annual electricity consumption for water heating, cold climate	2138		kWh
Annual energy consumption for space heating, warm climate	1731	1985	kWh
Annual electricity consumption for water heating, warm climate	2138		kWh
Seasonal space heating energy efficiency, cold climate:	177	133	%
Water heating energy efficiency, cold climate:	101		%
Seasonal space heating energy efficiency, warm climate:	171	127	%
Water heating energy efficiency, warm climate:	101		%
Sound power level LWA outdoors	-		dB

Data for package fiche

Controller class	VII		
Controller contribution to efficiency	3,5		%
Seasonal space heating energy efficiency of package, average climate:	175	132	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	180	137	%
Seasonal space heating energy efficiency of package, warm climate:	175	130	%

Model(s):		NIBE F1145-5 (+VPB300)										
Type of heat source/sink:		Brine-to-water										
Low-temperature heat pump:		No										
Equipped with supplementary heater:		Yes										
Heat pump combination heater:		Yes										
Climate condition:		Average										
Temperature application:		Medium temperature (55 °C)										
Applied standards: EN14825 and EN16147												
Rated heat output		Prated	5,0	kW	Seasonal space heating energy efficiency		η_s	128	%			
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>								
Tj = -7 °C	Pdh	3,5	kW	Tj = -7 °C	COPd	2,99	-					
Tj = +2 °C	Pdh	4,1	kW	Tj = +2 °C	COPd	3,57	-					
Tj = +7 °C	Pdh	4,3	kW	Tj = +7 °C	COPd	3,84	-					
Tj = +12 °C	Pdh	4,6	kW	Tj = +12 °C	COPd	4,04	-					
Tj = biv	Pdh	3,8	kW	Tj = biv	COPd	3,26	-					
Tj = TOL	Pdh	3,2	kW	Tj = TOL	COPd	2,74	-					
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		-					
Bivalent temperature				T _{biv}	-3,9	°C	Operation limit temperature		TOL	-10	°C	
Cycling interval capacity for heating				P _{cyh}		kW	Cycling interval efficiency		COP _{cyh}		-	
Degradation co-efficient				Cdh	0,99	-	Heating water operating limit		WTOL	65	°C	
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>								
Off mode	P _{OFF}	0,002	kW	Rated heat output		P _{sup}	1,8	kW				
Thermostat-off mode	P _{TO}	0,008	kW	Type of energy input		Electric						
Standby mode	P _{SB}	0,007	kW									
Crankcase heater mode	P _{CK}	0,012	kW									
<i>Other items</i>												
Capacity control				fixed								
Sound power level, indoors/outdoors				L _{WA}	43/-	dB	Rated air flow rate, outdoors				m ³ /h	
Annual energy consumption				Q _{HE}	3027	kWh	Rated water flow rate, indoor heat exchanger			0,35	m ³ /h	
							Rated brine or water flow rate, outdoor heat exchanger			0,62	m ³ /h	
<i>For heat pump combination heater:</i>												
Declared load profile				XXL				Water heating energy efficiency		η_{wh}	101	%
Daily electricity consumption				Q _{elec}	9,73	kWh	Daily fuel consumption		Q _{fuel}		kWh	
Annual electricity consumption				AEC	2138	kWh	Annual fuel consumption		AFC		GJ	
Approved by:												
Contact details		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden										