




**ENERG**  
енергия · ενεργεια

Y IJA  
IE IA

**NIBE**

NIBE F1145-6



55 °C

35 °C



**A++**

**A++**



**43** dB



dB



2015

811/2013



**ENERG**  
енергия · ενεργεια

Y IJA  
IE IA

**NIBE**

NIBE F1145-6 + VPB300




55°C



XXL



**A++**

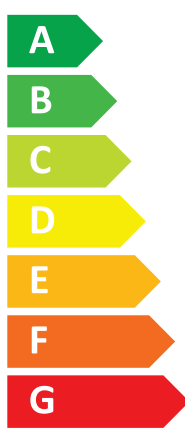

**A**

43 dB

dB



- 6 kW
- 6 kW
- 6 kW

2015

811/2013



# ENERG

енергия · ενεργεια

Y


IJA

IE

IA

**NIBE**

NIBE F1145-6



35 °C



A<sup>++</sup>

A<sup>+++</sup>

A<sup>+++</sup>

A<sup>++</sup>

A<sup>+</sup>

A

B

C


D

E

F

G

+



+



+



+





# ENERG

енергия · ενέργεια

Y






IJA

IE


IA


**NIBE**


## NIBE F1145-6 + VPB300









XXL

+ 




+ 

+ 



+ 



55 °C


XXL

Supplier's name:	<b>NIBE</b>		
Model:	<b>NIBE F1145-6 (+VPB 300)</b>		
Temperature application	35	55	°C
Declared load profile for water heating	<b>XXL</b>		
Seasonal space heating energy efficiency class, average climate:	<b>A++</b>	<b>A++</b>	
Water heating energy efficiency class, average climate:	<b>A</b>		
Rated heat output, average climate:	7	6	kW
Annual energy consumption for space heating, average climate	3010	3425	kWh
Annual electricity consumption for water heating, average climate	2025		kWh
Seasonal space heating energy efficiency, average climate:	184	137	%
Water heating energy efficiency, average climate:	106		%
Sound power level LWA indoors	43		dB
Rated heat output, cold climate:	7	6	kW
Rated heat output, warm climate:	7	6	kW
Annual energy consumption for space heating, cold climate	3487	3969	kWh
Annual electricity consumption for water heating, cold climate	2025		kWh
Annual energy consumption for space heating, warm climate	1966	2237	kWh
Annual electricity consumption for water heating, warm climate	2025		kWh
Seasonal space heating energy efficiency, cold climate:	190	141	%
Water heating energy efficiency, cold climate:	106		%
Seasonal space heating energy efficiency, warm climate:	182	135	%
Water heating energy efficiency, warm climate:	106		%
Sound power level LWA outdoors	-		dB

#### Data for package fiche

Controller class	VII		
Controller contribution to efficiency	3,5		%
Seasonal space heating energy efficiency of package, average climate:	188	140	%
Seasonal space heating energy efficiency class for package, average climate:	<b>A+++</b>	<b>A++</b>	%
Seasonal space heating energy efficiency of package, cold climate:	193	145	%
Seasonal space heating energy efficiency of package, warm climate:	186	139	%

<b>Model(s):</b>		<b>NIBE F1145-6 (+VPB 300)</b>								
Type of heat source/sink:		Brine-to-water								
Low-temperature heat pump:		No								
Equipped with supplementary heater:		Yes								
Heat pump combination heater:		Yes								
Climate condition:		Average								
Temperature application:		Medium temperature (55 °C)								
Applied standards: EN14825 and EN16147										
<b>Rated heat output</b>		Prated	6,0	kW	<b>Seasonal space heating energy efficiency</b>		$\eta_s$	137	%	
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>						
Tj = -7 °C	Pdh	4,8	kW	Tj = -7 °C	COPd	3,18	-			
Tj = +2 °C	Pdh	5,3	kW	Tj = +2 °C	COPd	3,69	-			
Tj = +7 °C	Pdh	5,6	kW	Tj = +7 °C	COPd	4,02	-			
Tj = +12 °C	Pdh	6,0	kW	Tj = +12 °C	COPd	4,29	-			
Tj = biv	Pdh	4,9	kW	Tj = biv	COPd	3,30	-			
Tj = TOL	Pdh	4,5	kW	Tj = TOL	COPd	2,96	-			
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		-			
Bivalent temperature				T <sub>biv</sub>	-5,3	°C	Operation limit temperature			
Cycling interval capacity for heating				P <sub>cyh</sub>		kW	Cycling interval efficiency		COP <sub>cyh</sub>	
Degradation co-efficient				Cdh	0,99	-	Heating water operating limit		WTOL	65
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>						
Off mode	P <sub>OFF</sub>	0,002	kW	Rated heat output		P <sub>sup</sub>	1,5	kW		
Thermostat-off mode	P <sub>TO</sub>	0,01	kW							
Standby mode	P <sub>SB</sub>	0,007	kW	Type of energy input		Electric				
Crankcase heater mode	P <sub>CK</sub>	0,014	kW							
<i>Other items</i>										
Capacity control		fixed		Rated air flow rate, outdoors					m <sup>3</sup> /h	
Sound power level, indoors/outdoors		L <sub>WA</sub>	43/-	dB	Rated water flow rate, indoor heat exchanger			0,49	m <sup>3</sup> /h	
Annual energy consumption		Q <sub>HE</sub>	3425	kWh	Rated brine or water flow rate, outdoor heat exchanger			0,90	m <sup>3</sup> /h	
<i>For heat pump combination heater:</i>										
<b>Declared load profile</b>		<b>XXL</b>		<b>Water heating energy efficiency</b>		$\eta_{wh}$	106	%		
Daily electricity consumption		Q <sub>elec</sub>	9,22	kWh	Daily fuel consumption		Q <sub>fuel</sub>		kWh	
Annual electricity consumption		AEC	2025	kWh	Annual fuel consumption		AFC		GJ	
<b>Approved by:</b>										
<b>Contact details</b>		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden								