




**ENERG**  
енергия · ενεργεια

Y IJA  
IE IA

**NIBE**

NIBE F1226-6



55 °C

35 °C



**A++**


**A++**



**43** dB



dB



kW

kW



2015

811/2013



**ENERG**  
енергия · ενέργεια

Y IJA  
IE IA

**NIBE**

NIBE F1226-6




55°C




XL



**A++**

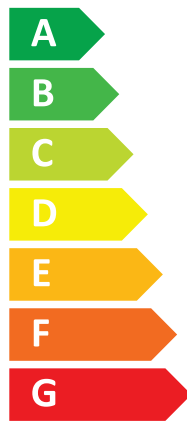

**A**

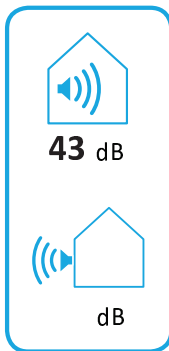

2015

811/2013



# ENERG

енергия · ενεργεια

Y

IJA

IE

IA

**NIBE**

NIBE F1226-6

 35 °C



A<sup>++</sup>

A<sup>+++</sup>

A<sup>++</sup>

A<sup>++</sup>

A<sup>+</sup>

A

B

C


D

E

F

G

+



+



+



+





# ENERG

енергия · ενεργεια

Y






IJA


IE


IA


**NIBE**


## NIBE F1226-6








+ 






+ 

+ 

+ 




55 °C

Supplier's name:	<b>NIBE</b>		
Model:	<b>NIBE F1226-6</b>		
Temperature application	35	55	°C
Declared load profile for water heating	<b>XL</b>		
Seasonal space heating energy efficiency class, average climate:	<b>A++</b>	<b>A++</b>	
Water heating energy efficiency class, average climate:	<b>A</b>		
Rated heat output, average climate:	7	6	kW
Annual energy consumption for space heating, average climate	3345	3726	kWh
Annual electricity consumption for water heating, average climate	1838		kWh
Seasonal space heating energy efficiency, average climate:	165	125	%
Water heating energy efficiency, average climate:	91		%
Sound power level LWA indoors	43		dB
Rated heat output, cold climate:	7	6	kW
Rated heat output, warm climate:	7	6	kW
Annual energy consumption for space heating, cold climate	3887	4322	kWh
Annual electricity consumption for water heating, cold climate	1838		kWh
Annual energy consumption for space heating, warm climate	2181	2438	kWh
Annual electricity consumption for water heating, warm climate	1838		kWh
Seasonal space heating energy efficiency, cold climate:	170	129	%
Water heating energy efficiency, cold climate:	91		%
Seasonal space heating energy efficiency, warm climate:	163	124	%
Water heating energy efficiency, warm climate:	91		%
Sound power level LWA outdoors	-		dB

#### Data for package fiche

Controller class	III		
Controller contribution to efficiency	1,5		%
Seasonal space heating energy efficiency of package, average climate:	166	127	%
Seasonal space heating energy efficiency class for package, average climate:	<b>A++</b>	<b>A++</b>	%
Seasonal space heating energy efficiency of package, cold climate:	171	130	%
Seasonal space heating energy efficiency of package, warm climate:	165	125	%

<b>Model(s):</b>		<b>NIBE F1226-6</b>							
Type of heat source/sink:		Brine-to-water							
Low-temperature heat pump:		No							
Equipped with supplementary heater:		Yes							
Heat pump combination heater:		Yes							
Climate condition:		Average							
Temperature application:		Medium temperature (55 °C)							
Applied standards: EN14825 and EN16147									
<b>Rated heat output</b>		Prated	6,0	kW	<b>Seasonal space heating energy efficiency</b>		$\eta_s$	125	%
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>					
Tj = -7 °C	Pdh	4,2	kW	Tj = -7 °C	COPd	2,90	-		
Tj = +2 °C	Pdh	4,8	kW	Tj = +2 °C	COPd	3,48	-		
Tj = +7 °C	Pdh	5,1	kW	Tj = +7 °C	COPd	3,73	-		
Tj = +12 °C	Pdh	5,4	kW	Tj = +12 °C	COPd	3,93	-		
Tj = biv	Pdh	4,5	kW	Tj = biv	COPd	3,18	-		
Tj = TOL	Pdh	3,9	kW	Tj = TOL	COPd	2,65	-		
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		-		
Bivalent temperature				T <sub>biv</sub>	-3,5	°C	Operation limit temperature		
Cycling interval capacity for heating				P <sub>cyh</sub>		kW	Cycling interval efficiency		
Degradation co-efficient				Cdh	0,99	-	Heating water operating limit		
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>					
Off mode	P <sub>OFF</sub>	0,002	kW	Rated heat output		P <sub>sup</sub>	2,1	kW	
Thermostat-off mode	P <sub>TO</sub>	0,01	kW						
Standby mode	P <sub>SB</sub>	0,007	kW	Type of energy input		Electric			
Crankcase heater mode	P <sub>CK</sub>	0,014	kW						
<i>Other items</i>									
Capacity control	fixed			Rated air flow rate, outdoors					m <sup>3</sup> /h
Sound power level, indoors/outdoors	L <sub>WA</sub>	43/-	dB	Rated water flow rate, indoor heat exchanger			0,42		m <sup>3</sup> /h
Annual energy consumption	Q <sub>HE</sub>	3726	kWh	Rated brine or water flow rate, outdoor heat exchanger			0,73		m <sup>3</sup> /h
<i>For heat pump combination heater:</i>									
<b>Declared load profile</b>		<b>XL</b>		<b>Water heating energy efficiency</b>		$\eta_{wh}$	91	%	
				Daily fuel consumption		Q <sub>fuel</sub>		kWh	
Daily electricity consumption	Q <sub>elec</sub>	8,37	kWh	Annual fuel consumption		AFC		GJ	
Annual electricity consumption	AEC	1838	kWh						
<b>Approved by:</b>									
<b>Contact details</b>		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden							